




1.0 LED

LED 4W | 220-240VAC | 50-60Hz
PCB 2-step | incl. PS | phase-cut dim


CE 0.68kg ⊕ 960° IP20 ⚡0,3⚡



1.0 QT14

QT14 max 75W | G9
220-240VAC | 50-60Hz


CE 0.62kg ⊕ 960° IP20 ⚡0,9⚡



2.0 LED

2xLED 4W | 220-240VAC | 50-60Hz
PCB 2-step | incl. PS | phase-cut dim


CE 0.69kg ⊕ 960° IP20 ⚡0,3⚡



3.0 LED

2xLED 4W | 220-240VAC | 50-60Hz
PCB 2-step | incl. PS | phase-cut dim



CE 0.91kg ⊕ 960° IP20 ⚡0,3⚡



2200K | >80CRI | 315lm



3000K | >80CRI | 420lm



OPTIONAL
QT14 LED 3W
3000K 300lm **9019G704**


OPTIONAL
flaps for adjustable beam angle



2200K | >80CRI | 2x315lm



3000K | >80CRI | 2x340lm




OPTIONAL
flaps for adjustable beam angle



2200K | >80CRI | 2x315lm



3000K | >80CRI | 2x340lm

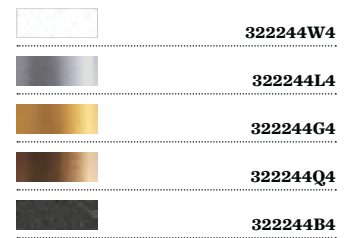

OPTIONAL
flaps for adjustable beam angle

