




Reflector: in high efficiency and anti-glare die-cast aluminium with anodised heat sink.
LED: luminous flux maintenance L70B50: 50.000h. Power factor >0.95

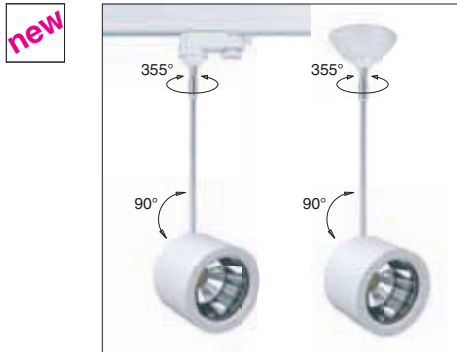

Vision 2.0 small - universal adapter					
		CLD CELL - SHORT version		W	LED (Ta=25°C)
wattage	colour	weight	code		K - olm - CRI - degrees
LED COB 26W	white	1,90	22702810-00	29	3000K - 3000lm - CRI 92 - 40°
	black		22702830-00		
	m. silver		22702870-00		

On request: CLD CELL-D (1-10V) and CLD CELLD-DIG (DALI) versions.

On request: 230V - ON-OFF version with adjustable tiges.

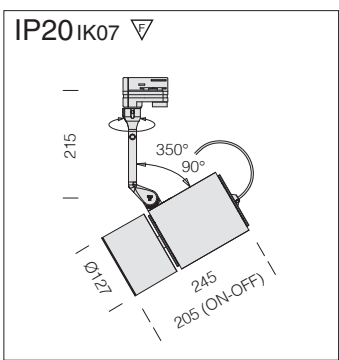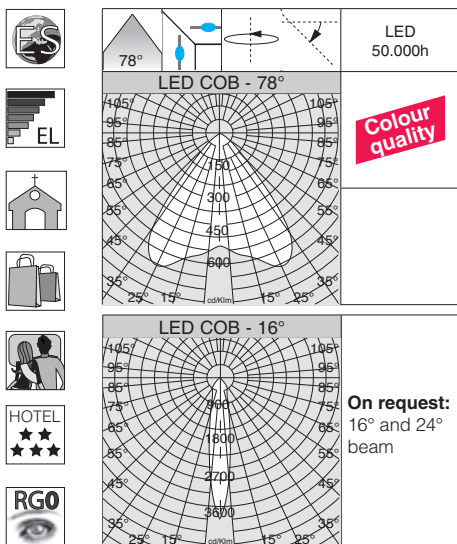


Reflector: in high efficiency and anti-glare die-cast aluminium with anodised heat sink.
LED: luminous flux maintenance L70B50: 50.000h. Power factor >0.95



Vision 2.0 big - universal adapter					
		CLD CELL - LONG version		W	LED (Ta=25°C)
wattage	colour	weight	code		K - olm - CRI - degrees
LED COB 42W	white	0,00	22702913-00	46	3000K - 5100lm - CRI 92 - 78°
	black		22702933-00		
	m. silver		22702973-00		


On request: CLD CELL-D (1-10V) and CLD CELLD-DIG (DALI) versions.

On request: ON-OFF version, 3000K - 4500lm - CRI 92

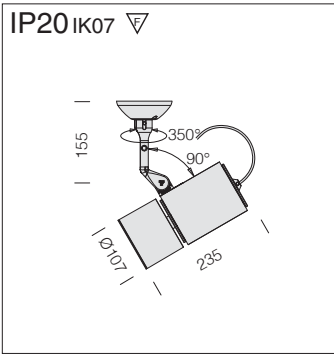


Reflector: in high efficiency and anti-glare die-cast aluminium with anodised heat sink.

LED: luminous flux maintenance L70B50: 50.000h.
Power factor >0.95

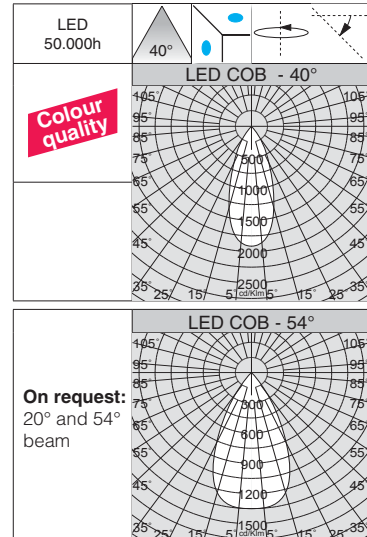


Vision 2.0 small - base					
		CLD CELL-D (1-10V) SHORT version		LED (Ta=25°C)	
wattage	colour	weight	code	W	K - ølm - CRI - degrees
LED COB 26W	white	1,90	22802810-00	29	3000K - 3000lm - CRI 92 - 40°
	black		22802830-00		
	m. silver		22802870-00		

On request: CLD CELLD-DIG (DALI) version.

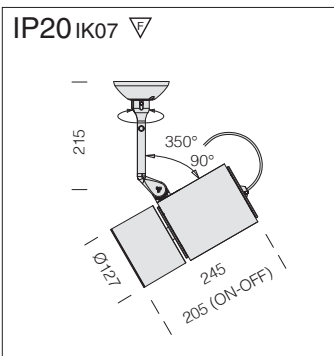

Reflector: in high efficiency and anti-glare die-cast aluminium with anodised heat sink.

LED: luminous flux maintenance L70B50: 50.000h.
Power factor >0.95

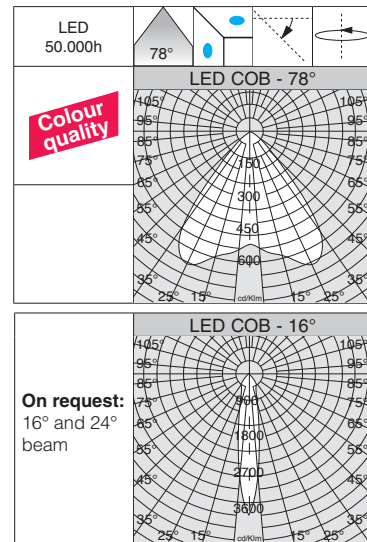

Vision 2.0 big - base					
		CLD CELL-D (1-10V) LONG version		LED (Ta=25°C)	
wattage	colour	weight	code	W	K - ølm - CRI - degrees
LED COB 42W	white	2,30	22802913-00	46	3000K - 5100lm - CRI 92 - 78°
	black		22802933-00		
	m. silver		22802973-00		

On request: CLD CELLD-DIG (DALI) version.



On request: ON-OFF version, 3000K - 4500lm - CRI 92